



Codes			
E1101O-T160DSE	E1101O-T200DSE	E1101O-T300DSE	E1101O-T500DSE
E1102O-T160DSE	E1102O-T200DSE	E1102O-T300DSE	E1102O-T500DSE
E1103O-T160DSE	E1103O-T200DSE	E1103O-T300DSE	E1103O-T500DSE

Fegen Solar Modules SM series are All-in-One, Plug & Play, Outdoor, Scalable enclosures that incorporate all solar thermal and solar electric distribution gear for buildings in one device.

- No need of a conventional indoor boiler room
- No on-site labor cost
- Immediate start-up
- No responsibility conflicts
- Easy control and maintenance
- Scalable for infinite combinations

- **Tight single door dimensions**
- **160-500 liters water storage**
- **Integrated heating element**
- **Simple DC pump design**
- **Solar back up system for redundancy**
- **Defrost system for reliability**
- **Solar pool gear option (P extension coded)**
- **Cost efficient mounted outdoors 1ph 1-3kWdC inverter**

CABIN GENERAL CHARACTERISTICS

	Thermal Part
Type	RITTAL TS 8
External dimensions W x H x D (front view)	800 x 2000 x 800 mm / 31,50 x 78,74 x 31,50 inch
Mounting plate W x H	Width: 699 mm, Height: 1896 mm
Weight/pack	137 kg
Material	Sheet steel
Cold / Hot Supply - Brass	1 ¼ inch
Color	RAL 7035
Protection category IP to IEC 60 529	IP 55
Doors	1
Light	Auto door power On/Off - 600 lumens
Scalability	Unlimited
Protection	Over-temperature, Anti-freeze control
Approvals	Bureau Veritas, CSA, TÜV, DNV-GL, Lloyds Register of Shipping, Russian Maritime Register of Shipping, UL + C-UL
Certificates	EAC,IK-Code, Protection category
Declarations	Declaration of conformity, Manufacturer's declaration
Certification	SRCC, Solar Keymark, CE

CABIN LIGHTING SYSTEM-TECHNICAL SPECIFICATIONS

	General Data
Type	RITTAL LED system light
Material	Light body: Extruded aluminium, Light cover: Polycarbonate (halogen-free) Light ends: PC-ABS (halogen-free)
Color	Enclosure: RAL 7016
Protection category IP to IEC 60 529	IP 20
Dimensions	Width: 337 mm, Height: 55 mm, Depth: 23 mm
Rated operating voltage	100 V - 240 V, 1~, 50 Hz/60 Hz
Operating temperature	Operation (environment): -20°C...+55°C
Power consumption	7 W
Luminous flux	600 lm
Light colour	4000 K (neutral white)
Protection category	II (all-insulated)
Weight/pack	0.35 kg
Approvals	CCC, ENEC
Certificates	EAC

SOLAR TANK CHARACTERISTICS	T160	T200	T300	T500
General Data				
Type	Sammler SV			TESY EV
Solar tank capacity	160 lt / 40 gal	200 lt / 50 gal	300 lt / 80 gal	500 lt / 132 gal
External dimensions W x H	580 x 1058 mm 22,83 x 41,6 inch	580 x 1292 mm 22,83 x 50,9 inch	580 x 1735 mm 22,83 x 68,3 inch	750 x 1674 mm 29,5 x 66 inch
Weight	67 kg / 235 lb	82 kg / 235 lb	107 kg / 235 lb	145 kg / 320 lb
Number of boilers	1			
Max pressure primary circuit	3 bar			8 bar
Max pressure secondary circuit	3 bar			6 bar
Electric Resistance	1.50 – 4.00 KW (UL Ready) - not included			
Anti-corrosion protection	2 x magnesium anodes			
Certification	SRCC, Solar Keymark, CE			Solar Keymark, CE

DC CIRCULATION PUMP

General Data	
Type	DC Solar Pump
Power	10W (6-24 Vdc)
Max Capacities	22 Lpm / 6 Gpm
Max heads	3,2 m / 10,5 ft
Suitable fluids	Water / Glycol
Maximum working temperature	110 °C / 230 °F
Max. working pressure	10 bar
Number of DC Pumps	1
Protection	Over-temperature, overload, Over voltage, dry running protection
Temperature Sensors	
Platinum RTD type	1,000 ohm
Collector sensor working range	-58 - 355 °F (-50 - 180 °C)
Tank sensor working range	15 - 175 °F (-10 - 80 °C)
Length of collector black cable	60 in (1.5 m)
Length of tank sensor gray cable	95 in (2.5 m)
Glycol (recommended type)	
Type	DOWFROST HD
Recommended temperature range	-46°C..163°C
Freezing Point	-33.5 °C
Boiling Point @ 1 bar	105.6 °C
Freeze protection temperature	-51 °C
Burst protection temperature	-73 °C
Weight % Propylene Glycol	94
Weight % performance additives	6
Specific gravity (15 °C)	1.053 - 1.062
pH of Solution	9.5 - 10.5
Reserve alkalinity	15.0 ml

TECHNICAL DATA AND TYPES

Fimer type code

UNO-DM-1.2-TL-PLUS-Q

UNO-DM-2.0-TL-PLUS-Q

UNO-DM-3.0-TL-PLUS-Q

Input side

Absolute maximum DC input voltage ($V_{max,abs}$)	600 V	600 V	600 V
Start-up DC input voltage (V_{start})	120 V (adj. 100...150 V)	150 V (adj. 100...250 V)	150 V (adj. 100...250 V)
Operating DC input voltage range ($V_{dmin}...V_{dmax}$)	0.7 x V_{start} ...580 V (min 90 V)		
Rated DC input voltage (V_{dcr})	185 V	300 V	300 V
Rated DC input power (P_{dcr})	1500 W	2500 W	3300 W
Number of independent MPPT	1	1	1
Maximum DC input power for each MPPT ($P_{MPPTmax}$)	1500 W	2500 W	3300 W
DC input voltage range with parallel configuration of MPPT at P_{acr}	100...530 V	210...530 V	320...530 V
DC power limitation with parallel configuration of MPPT	N/A		
DC power limitation for each MPPT with independent configuration of MPPT at P_{acr} , max unbalance example	N/A		
Maximum DC input current (I_{dcmax}) / for each MPPT ($I_{MPPTmax}$)	10.0 A	10.0 A	10.0 A
Maximum input short circuit current for each MPPT	12.5 A	12.5 A	12.5 A
Number of DC input pairs for each MPPT	1	1	1
DC connection type ¹⁾	Quick Fit PV Connector		

Input protection

Reverse polarity protection	Yes, from limited current source		
Input over voltage protection for each MPPT-varistor	Yes		
Photovoltaic array isolation control	According to local standard		
DC switch rating for each MPPT (version with DC switch)	25 A / 600 V		

Output side

AC grid connection type	Single-phase		
Rated AC power (P_{acr} @ $\cos\phi=1$)	1200 W	2000 W	3000 W
Maximum AC output power (P_{acmax} @ $\cos\phi=1$)	1200 W	2000 W	3000 W
Maximum apparent power (S_{max})	1200 VA	2000 VA	3000 VA
Rated AC grid voltage (V_{acr})	230 V		
AC voltage range ²⁾	180...264 V		
Maximum AC output current ($I_{ac,max}$)	5.5 A	10.0 A	14.5 A
Contributory fault current	10.0 A	12.0 A	16.0 A
Rated output frequency (f_r) ³⁾	50/60 Hz		
Output frequency range ($f_{min}...f_{max}$) ³⁾	47...53/57...63 Hz		
Nominal power factor and adjustable range	> 0.995, adj. ± 0.1 - 1 (over/under excited)		
Total current harmonic distortion	< 3%		
AC connection type	Female connector from panel		

Output protection


Anti-islanding protection	According to local standard		
Maximum external AC overcurrent protection	10.0 A	16.0 A	16.0 A
Output overvoltage protection - varistor	2 (L - N / L - PE)		

Operating performance

Maximum efficiency (η_{max})	94.8%	96.7%	96.7%
Weighted efficiency (EURO/CEC)	92.0%/-	95.0%/-	95.0%/-
Feed in power threshold	8 W		
Night consumption	<0.4 W		

TECHNICAL DATA AND TYPES

Fimer Type code	UNO-DM-1.2-TL-PLUS-Q	UNO-DM-2.0-TL-PLUS-Q	UNO-DM-3.0-TL-PLUS-Q
Embedded communication			
Embedded communication interface 4)	Wireless		
Embedded communication protocol	ModBus TCP (SunSpec)		
Commissioning tool	Web User Interface, Aurora Manager Lite		
Monitoring	Plant Portfolio Manager, Plant Viewer, Plant Viewer for Mobile, Energy Viewer		
Optional board UNO-DM-COM kit			
Optional communication interface	RS485 (use with meter for dynamic feed-in control), Alarm/Load manager relay, Remote ON/OFF		
Optional communication protocol	ModBus RTU (SunSpec), Aurora Protocol		
Optional board UNO-DM-PLUS Ethernet COM kit			
Optional communication interface	Ethernet, RS485 (use with meter for dynamic feed-in control), Alarm/Load manager relay, Remote ON/OFF		
Optional communication protocol	ModBus TCP (SunSpec), ModBus RTU (SunSpec), Aurora Protocol		
Environmental			
Ambient temperature range	-25...+60°C /-13...140°F with derating above 50°C/122°F	-25...+60°C /-13...140°F with derating above 50°C/122°F	-25...+60°C /-13...140°F with derating above 50°C/122°F
Relative humidity	0...100 % condensing		
Acoustic noise emission level	50 dBA @ 1 m		
Maximum operating altitude without derating	2000 m / 6560 ft		
Physical			
Environmental protection rating	IP 65		
Cooling	Natural		
Dimension (H x W x D)	553 x 418 x 175 mm / 21.8” x 16.5” x 6.9”		
Weight	15 kg / 33 lbs		
Mounting system	Wall bracket		
Safety			
Isolation level	transformerless		
Marking	CE , RCM		
Safety and EMC standard	IEC/EN 62109-1, IEC/EN 62109-2, AS/NZS 4777.2, EN 61000-6-1,EN 61000-6-2, EN 61000-6-3, EN 61000-6-4, EN 61000-3-2, EN 61000-3-3		
Grid standard (check your sales channel for availability) 5)	CEI 0-21, DIN V VDE V 0126-1-1, VDE-AR-N 4105, G83/2, G59/3, G98-1, G99-1, RD 413, ITC-BT-40, AS/NZS 4777.2, IEC 61727, IEC 62116		
Available products variants			
Standard	UNO-DM-1.2-TL-PLUS-B-Q	UNO-DM-2.0-TL-PLUS-B-Q	UNO-DM-3.0-TL-PLUS-B-Q
With DC switch	UNO-DM-1.2-TL-PLUS-SB-Q	UNO-DM-2.0-TL-PLUS-SB-Q	UNO-DM-2.0-TL-PLUS-SB-Q

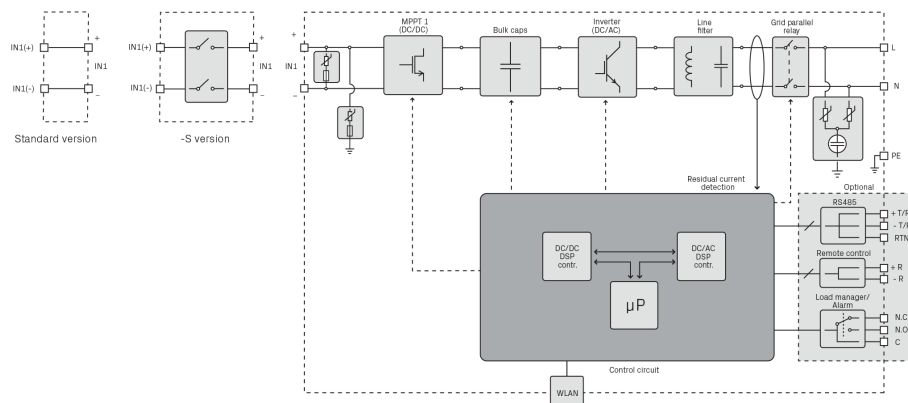

UNO-DM-1.2/2.0/3.0-TL-PLUS-Q string inverter block diagram

Models using other branded solar thermal or solar electric gear upon demand.